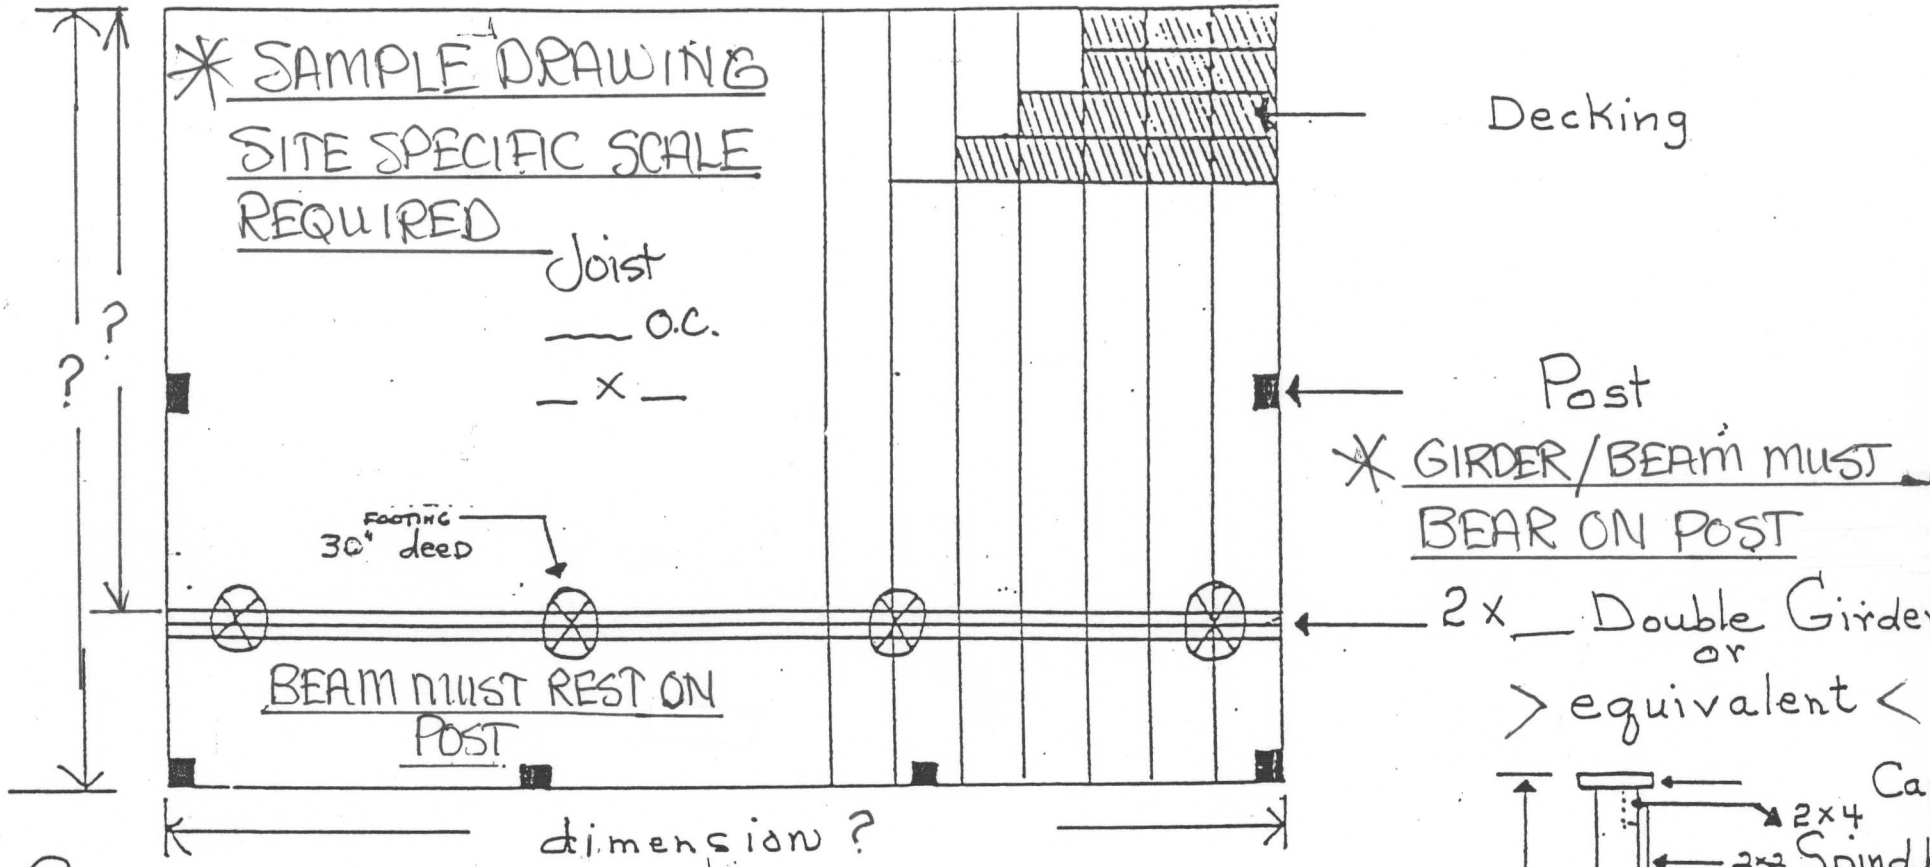

Sample Drawing
for reference Only

"Note"
Spindles to be less
than 4" in between

Guard rails to be
36" in height

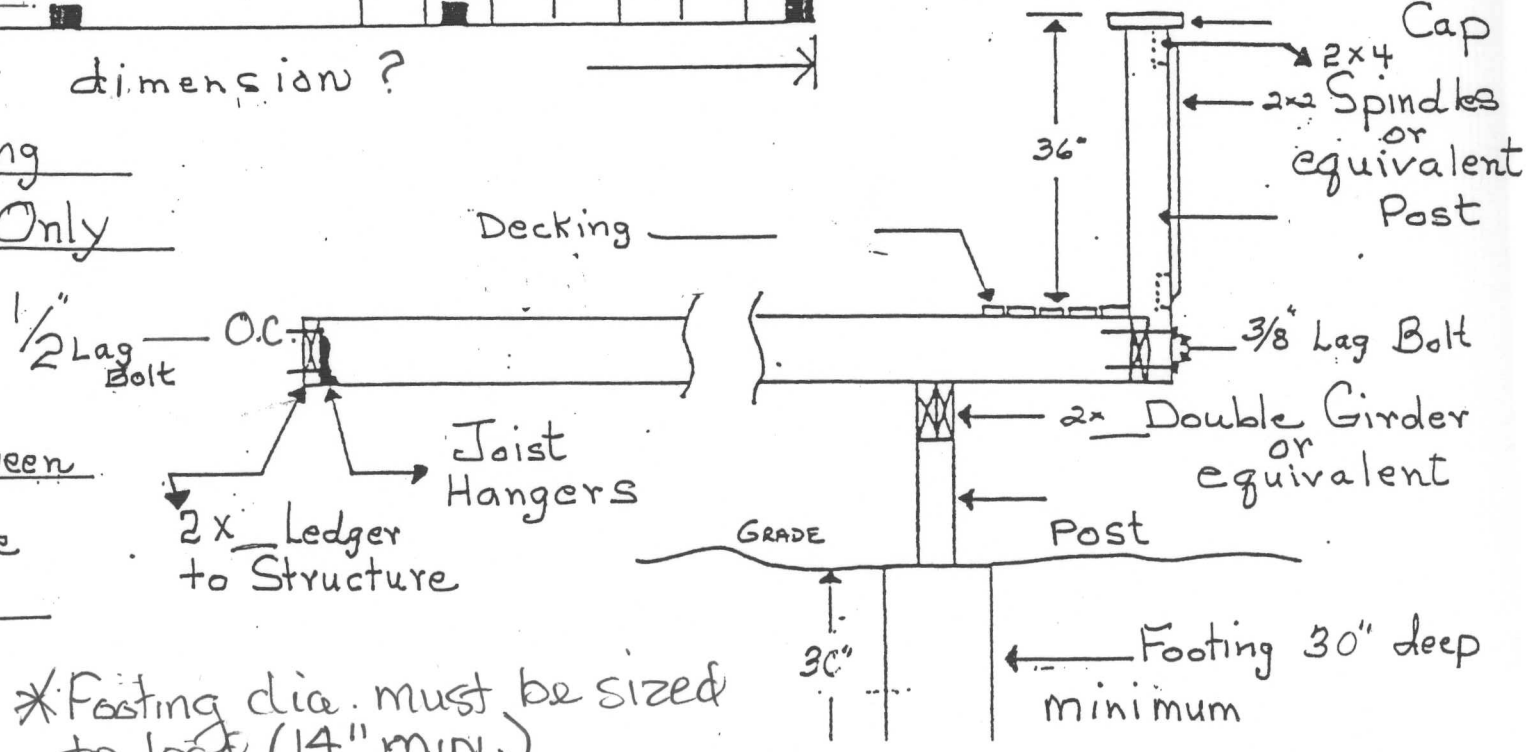

* Footing dia. must be sized
to load (14" min.)